

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

10/519184

(43) International Publication Date
8 January 2004 (08.01.2004)


PCT

(10) International Publication Number
WO 2004/003831 A1

- (51) International Patent Classification⁷: G06K 7/10, G07F 7/06
- (21) International Application Number: PCT/NO2003/000213
- (22) International Filing Date: 25 June 2003 (25.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20023091 26 June 2002 (26.06.2002) NO
- (71) Applicant (for all designated States except US): TOMRA SYSTEMS ASA [NO/NO]; Drengsrudhagen 2, N-1372 Asker (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): NORDBRYHN, Andreas [NO/NO]; Nilserudkleiva 12 A, N-0874 Oslo (NO).
- (74) Agent: LANGAN, Hans; Zacco Norway As, P.O. Box 765, Sentrum, N-0106 Oslo (NO).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DEVICE FOR RECOGNISING CONTAINERS

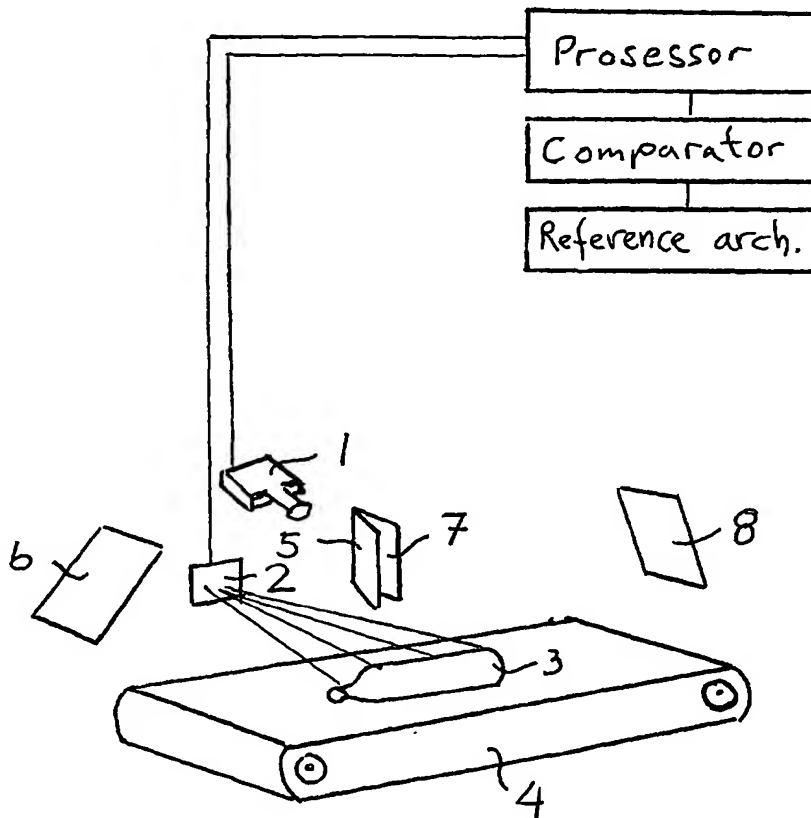

(57) Abstract: A device for recognising a container, such as a bottle or a can, comprising a camera and light emission means (1, 2) arranged for imaging a selected portion of the container (3). This means is connected to a processor or the like adapted for recognition, based on a camera-recorded image, of special features related to the container. To be able to use a standard type camera with limited resolution, the imaging of the container is carried out via an assembly of mirror faces (5, 6, 7, 8), which in pairs are arranged relative to one another in such manner that two areas along the longitudinal direction of the container (3) are imaged simultaneously by the camera (1). The mirror faces in respective pairs face each other and are positioned on the same side of the optical axis of the camera (1), with one of the mirror faces (5, 7) adjacent to the optical axis, and during the imaging process the camera is directed towards the mirror faces adjacent to the optical axis, in which the two areas of the container are shown as a respective mirror image in the respective mirror face.

WO 2004/003831 A1



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Device for recognising containers

The present invention relates to a device for recognising a container, such as a bottle or a can, and in particular to a device for recognising distinctive features related to the container by imaging a relatively elongate and narrow area of the container.

In the field of reverse vending machines for beverage containers there are many different types of machines wherein container recognition is based on using the shape, bar code and material of the container, by either isolated or combined recognition of the respective distinctive features associated with the container. Furthermore, US Patent No. 5593017 discloses that container recognition can be performed by a camera and light emission means which images a marking provided on the container in the form of an embossment, for example. This particular means is connected to a processor and positioned in such manner that it faces the marking during the imaging process. The processor is equipped with the components necessary for recognition of the container by using this camera-recorded image.

However, recognition based on a camera-recorded image requires the use of a high-resolution camera. This is because the image of the container, and in particular its bar code, must have a high image quality in order to be used during the recognition procedure in the processor. The fact that the image should, as in the recognition of, for example, a bar code, cover a relative elongate and narrow area of the container, also contributes to the increased need for high resolution. The last-mentioned factor involving the imaging of such elongate and narrow areas also differs greatly from the length/breadth ratio in a standard type camera.

Accordingly, the object of the present invention is to provide a device of the type mentioned above which unlike the previously known devices can use a standard type camera that has limited resolution, and which can easily be converted from, for instance, a 500 x 500 element camera to a 1000 x 250 element camera. The use of such a standard type camera gives, among other things, a reduction in production costs and in the need for a calculating capacity in the processor.

According to the present invention, this object is achieved by means of a device for recognising a container, such as a bottle or can, comprising a camera and light emission means arranged for imaging a selected portion of the container, wherein the camera and light emission means is connected to a processor or the like adapted for recognition,

based on a camera-recorded image of the marking, of distinctive features related to the container, characterised in that the imaging of the container is carried out via an assembly of mirror faces which in pairs are positioned in such manner relative to each other that two areas along the longitudinal direction of the container, optionally
5 including one or both end faces, are imaged simultaneously by the camera, wherein the mirror faces in respective pairs face each other and are located on the same side of the optical axis of the camera, with one of the mirror faces adjacent to the optical axis, and that during the imaging process the camera is directed towards the mirror faces adjacent to the optical axis, in which the two areas of the container are shown as respective
10 mirror images in the respective mirror face.

Other advantageous features of the present invention will be apparent from the dependent claims and the description.

15 The invention will now be explained in more detail with reference to an exemplary embodiment shown in the attached drawings.

Fig. 1 is a schematic perspective view of an embodiment of the present invention used in connection with a reverse vending machine for beverage containers, in which the
20 imaging of the container is carried out by using an assembly of mirror faces which in pairs are positioned relative to each other in such manner that two areas along the longitudinal direction of the container are imaged simultaneously by the same camera, the mirror faces in respective pairs facing each other and being positioned on the same side of the optical axis of the camera, with one of the mirror faces adjacent to the optical
25 axis.

Fig. 2 shows in a simplified manner in a schematic illustration, seen in the direction of the mirror faces adjacent to the optical axis of the camera, how the camera "sees" the two areas with the aid of the pairs of mirror faces.

30

Figs. 3a-c show a cross section of different embodiments of the mirror faces adjacent to the optical axis of the camera.

Although in the discussion of the drawings it is mentioned that the present device is a
35 part of a reverse vending machine for beverage containers, it should be noted that the invention is not limited to either reverse vending machines or to beverage containers. Consequently, the device according to the invention could be included in a structure,

e.g., a sorting plant, where it is appropriate to recognise containers based on camera-recorded images of the marking thereon. Similarly, the containers may be filled with or have contained any suitable medium.

5 Moreover, it should be noted that known reverse vending machines may be constructed in different ways depending upon the specifications regarding their operation. For the sake of simplicity, Fig. 1 therefore shows only the components that are necessary for the understanding of the invention, i.e., the camera and light emission means, the mirror assembly, the associated processor with comparator and reference archive, and the
10 conveyor of the reverse vending machine. The present device for recognising containers may thus constitute a supplementary element in a reverse vending machine which, for example, has conventional equipment for recognition by means of the shape, bar code and material of the container. However, such conventional recognition equipment could also in some cases be replaced by the device according to the
15 invention, thereby giving the reverse vending machine a much simpler structure.

The conveyor that is illustrated schematically in the drawing is of any type used in such reverse vending machines, for example, of the type able to rotate the container about its longitudinal axis into the right position relative to the equipment for recognition of the
20 bar code etc. In that case, the conveyor may consist of two conveyor belts so positioned that they form a V-shape in cross section, and which are drawn apart to bring the container into contact with subjacent rollers for rotation about its longitudinal axis.

The schematically illustrated processor is of any commonly used type. Furthermore, the
25 processor is adapted to control the operation of the camera and light emission means, so that, for instance, the light emission can be synchronised with the exposure of the camera, and preferably comprises a comparator and a reference archive. During the container recognition procedure, the processor chooses whether the comparator is to compare the whole of or only selected parts of the image along the longitudinal
30 direction of the container with the reference archive, so that distinctive features related to the container can thus be recognised.

The present device comprises a camera and light emission means 1, 2 arranged for imaging the container 3 along its longitudinal direction over a relatively elongate and
35 narrow area. The container is in the form of either a can or a bottle, usually of relatively long length. The camera and light emission means is connected to a processor or the like which, based on the camera-recorded image, is able to recognise distinctive features

related to the container. Moreover, the means is so positioned that when the container is on a conveyor 4, the optical axis of the camera lens is directed essentially towards a longitudinal vertical plane through the conveyor. To provide the desired image of the container there is used according to the present invention an assembly of mirror faces 5, 6, 7, 8 which in pairs are positioned relative to each other in such manner that two areas
5 along the longitudinal direction of the container 3 can be imaged simultaneously by the camera 1. Furthermore, the mirror faces in respective pairs face each other, as shown in Fig. 1, and are positioned on the same side of the optical axis of the camera 1, with one of the mirror faces 5, 7 adjacent to the optical axis. The two mirror images of the
10 container which appear on the respective mirror faces adjacent to the optical axis consequently constitute the two simultaneous images from the camera.

The size of the areas that are to be imaged, and their location on the container 3 can be determined by the interpositioning of the mirror faces in respective pairs. Although Fig.
15 2 shows imaging only along the side face of the container, it will be appreciated that one or both end faces can also be included in the imaging, if desirable. Otherwise, the size of the mirror faces in respective pairs depends upon the distance to the camera, and must be chosen so that the whole field of view is covered. Furthermore, the mirror faces 5, 7 adjacent to the optical axis of the camera are arranged symmetrically and face
20 in opposite directions to each other.

The line of intersection between the mirror faces 5, 7 adjacent to the optical axis of the camera is essentially at right angles to the optical axis. However, this is not a condition for the mirror faces as such, as they can be arranged as desired relative to the optical
25 axis. As already mentioned, the angular position of the mirror faces relative to each other in respective pairs determines which areas of the container are chosen for simultaneous imaging by the camera 1. Otherwise, the illustrated arrangement with the mirror surfaces adjacent to the optical axis of the camera above the container is not a condition as these mirror faces can, as required, be placed in a desired position around
30 the longitudinal axis of the container. It will also be understood that there may be a departure from the symmetrical arrangement of the mirror faces in respective pairs relative to the optical axis of the camera.

Preferred embodiments of the mirror faces 5, 7 adjacent to the optical axis of the camera are shown in Figs. 3a-c. Thus, these mirror faces may consist of a triangular prism
35 body, of which the two sides facing the camera are mirror-coated, or of two square, mirror-coated plates. In the last-mentioned case, the side edge of the plates adjacent to

the optical axis is bevelled, and is either positioned so that the two bevelled side edges meet or has the plates offset relative to each other along the optical axis. With an embodiment of the mirror faces adjacent to the optical axis as shown in Figs. 3a-b, the centre point of the mirror faces will lie essentially along a straight line. However, in the
5 embodiment shown in Fig. 3c, the centre point of the mirror faces in the respective pairs will lie along respective straight lines that are parallel to each other.

As shown in Fig. 1, the emission of light can be effected using a single light source 2 that covers the whole image area of the container 3. However, it will be appreciated
10 that more light sources could be used, for instance light sources of different light intensity, and that the positioning may differ from that shown. The light is of any suitable type, preferably short-pulsed light, and respective light sources may consist of at least one light-emitting diode. It should also be added that the camera mentioned
15 above is of any type within this field, for example, a CCD camera which is highly suitable for use with short-pulsed light.

P a t e n t c l a i m s

1.

A device for recognising a container, such as a bottle or a can, comprising a camera and
5 light emission means (1, 2) arranged for imaging a selected portion of the container (3),
said camera and light emission means being connected to a processor or the like adapted
for recognition, based on a camera-recorded image, of special features related to the
container, characterised in that the imaging of the container is carried out via an
10 assembly of mirror faces (5, 6, 7, 8) which in pairs are positioned relative to one another
in such manner that two areas along the longitudinal direction of the container (3),
optionally including one or both end faces, are imaged simultaneously by the camera
(1), the mirror faces in respective pairs facing each other and being positioned on the
same side of the optical axis of the camera (1), with one of the mirror faces (5, 7)
adjacent to the optical axis, and that during the imaging process the camera is directed
15 towards the mirror faces adjacent to the optical axis, in which the two areas of the
container are shown as a respective mirror image in the respective mirror face.

2.

A device according to claim 1, characterised in that the line of intersection between the
20 mirror faces (5, 7) adjacent to the optical axis of the camera is essentially perpendicular
to the optical axis, these mirror faces being positioned symmetrically and directed in the
opposite direction to each other.

3.

25 A device according to claim 2, characterised in that the mirror faces (5, 7) adjacent the
optical axis of the camera are so positioned that one of their sides edges meet.

4.

30 A device according to claim 2, characterised in that the mirror faces (5, 7) adjacent to
the optical axis of the camera are offset relative to each other along the optical axis.

5.

A device according to any one of the preceding claims, characterised in that the mirror
surfaces (5, 6, 7, 8) in each pair are positioned obliquely relative to each other.

35

6.

A device according to any of the preceding claims, characterised in that the

imaging is carried out when the container (3) is on a conveyor (4) provided in a reverse vending machine for beverage containers.

7.

- 5 A device according to any one of the preceding claims, characterised in that the processor comprises a comparator adapted to recognise, on the basis of the image selected by the processor, the respective areas along the longitudinal direction of the container (3) on comparison with a reference archive.

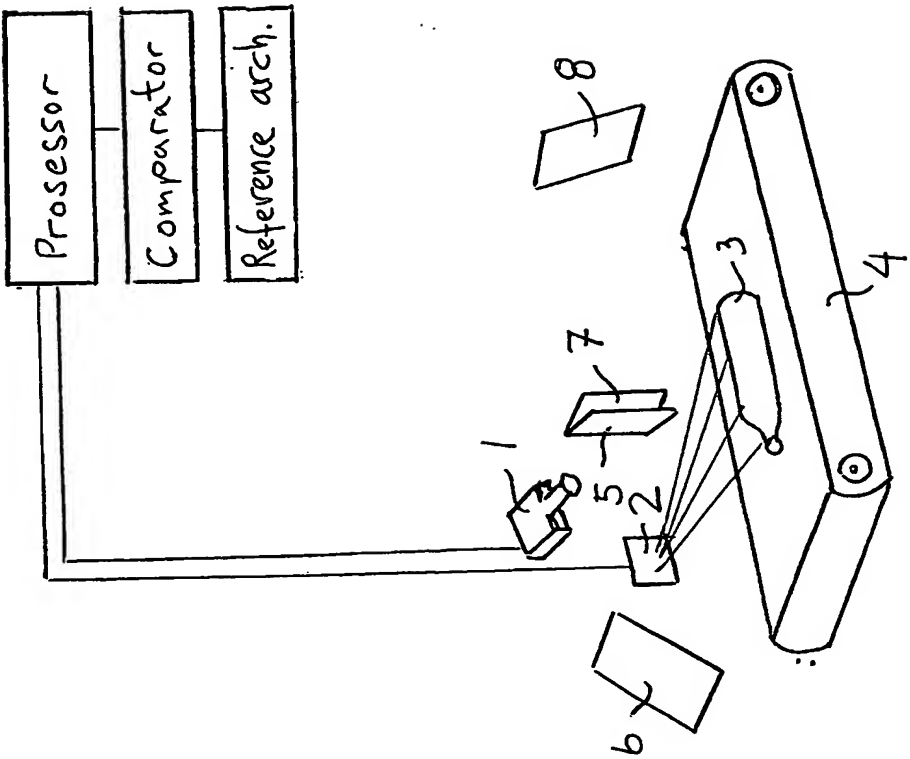


Fig.1

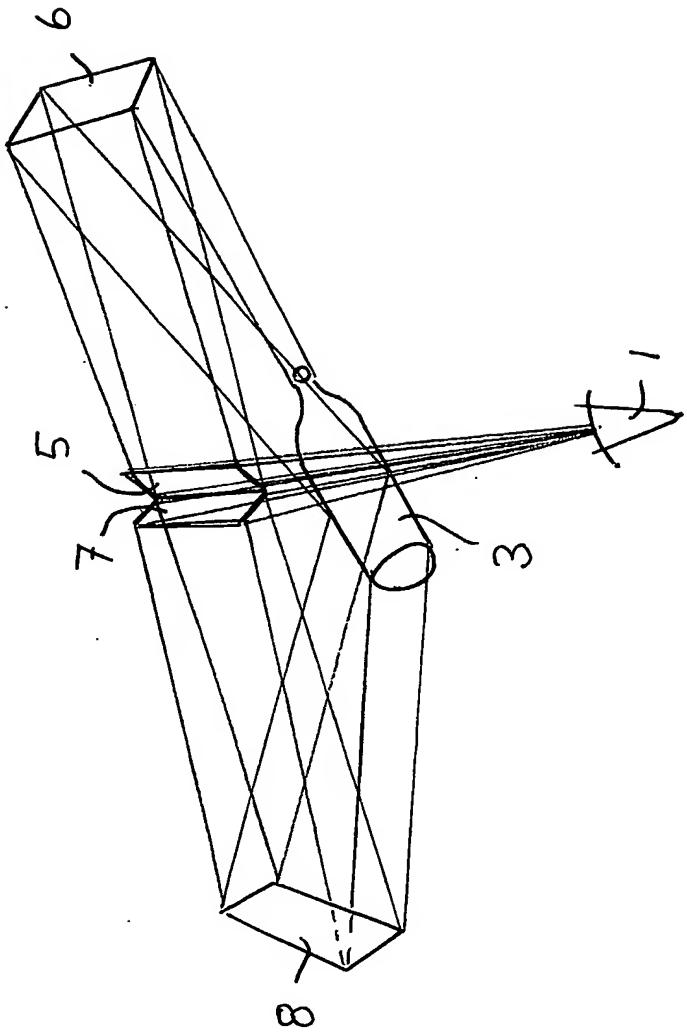


Fig.2

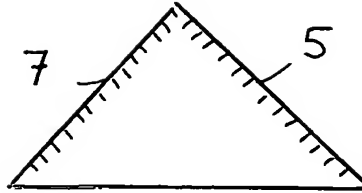


Fig. 3a




Fig. 3b




Fig. 3c

INTERNATIONAL SEARCH REPORT

International application No.

PCT/N 3/00213

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G06K 7/10, G07F 7/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B07C, G01N, G02B, G06K, G07F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2001042789 A1 (KRICHEVER, M. ET AL), 22 November 2001 (22.11.01), page 1, paragraphs [0007] - [0009], [0018]; page 2, paragraphs [0021] - [0022]; figure 3 --	1-3,5-7
A	US 5593017 A (POWELL, K.R. ET AL), 14 January 1997 (14.01.97), see the whole document -- -----	1-7

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

9 December 2003

Date of mailing of the international search report

12 -12- 2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Bo Gustavsson /OGU

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

06/09/03

International Application No.
PCT/NO 03/00213

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	2001042789	A1	22/11/01	AU	7609501 A	11/07/02
				CN	1362691 A	07/08/02
				EP	1223535 A	17/07/02
				JP	2002230475 A	16/08/02

US	5593017	A	14/01/97	NONE		
